

Part No. Description

TCA ****** ****** ******
 Frequency Attenuation Temperature coefficient code

Model	Frequency Range (GHz)	Attenuation (dB)	Temperature Coefficient Code	Temperature Coefficient of Attenuation (dB/dB/°C)	Max. VSWR (:1) @1GHz@25°C	Max. Input Power (W)	Attenuation Accuracy (dB)
TCA0601N*	DC-6	1	N3~N9	-0.003~ -0.009	1.2	2	±0.3
TCA0602N*	DC-6	2	N3~N9	-0.003~ -0.009	1.2	2	±0.3
TCA0603N*	DC-6	3	N3~N9	-0.003~ -0.009	1.2	2	±0.3
TCA0604N*	DC-6	4	N3~N9	-0.003~ -0.009	1.2	2	±0.5
TCA0605N*	DC-6	5	N3~N9	-0.003~ -0.009	1.2	2	±0.5
TCA0606N*	DC-6	6	N3~N9	-0.003~ -0.009	1.2	2	±0.5
TCA0607N*	DC-6	7	N3~N9	-0.003~ -0.009	1.2	2	±0.5
TCA0608N*	DC-6	8	N3~N9	-0.003~ -0.009	1.2	2	±0.5
TCA0609N*	DC-6	9	N3~N9	-0.003~ -0.009	1.2	2	±0.5
TCA0610N*	DC-6	10	N3~N9	-0.003~ -0.009	1.2	2	±0.5

Specifications

- Frequency Range DC to 6GHz
- Attenuation 10dB
- Attenuation Accuracy at 25°C ±0.5dB@1GHz
- VSWR 1.2:1 Max. @1GHz at 25°C
- Nominal Impedance 50 Ohms
- Power Rating 2 Watts
- Power Derating 100% @ 25°C
Derates to 0% @ 150°C
- Operating Temperature -55°C~+150°C
- Temperature Coefficient Over Operating Temperature Range: See Table Above ,
Temperature coefficient Tolerance:+0.001dB/dB/°C
- RoHS Compliant Lead Free Silver Over Nickel Plating
- Electrostatic Discharge Control: PER MIL-STD-1686

Unit Marking dB Value (XX), Direction of Shift (N) and TCA Shift(X)
 Legibility and Permanency Per MIL-STD-130

Quality Assurance

- Sample Inspect PER ANSI/ASQC Z1.4 General Inspection, LEVEL II, AQL = 1.0
- Select five (5) Units from lot measure DCA every 20°C Over The temperature range -55°C TO +125°C
 - Calculate, using linear regression, The slope of the curve.
 - Calculate TCA using the following formula: TCA = Slope / Attenuation @ 25°C
- Inspection in accordance with QA00006 and FORM0357 for commercial grade product
- TEST DATA required for customer

Package: Standard pack per MC0023


Yantel Corporation

Add: 16th Floor, West, AIDI Building, Binhe Road, Futian Area, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

TCA Response

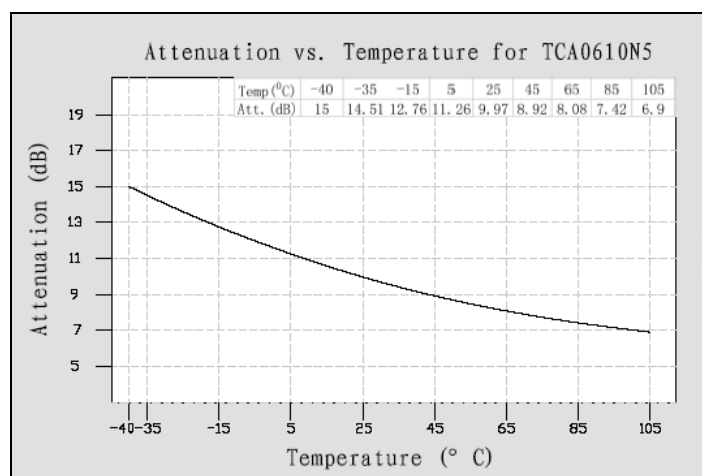


Package Outlines

All dimensions shown in mm unless stated otherwise

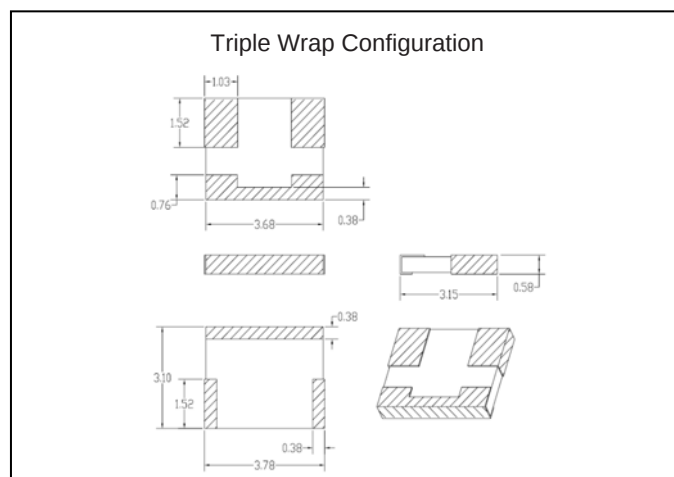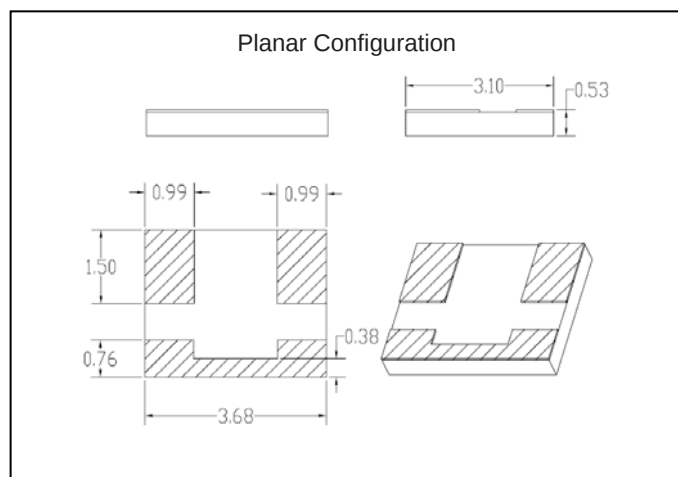

Tape&Reel

All dimensions shown in mm unless stated otherwise

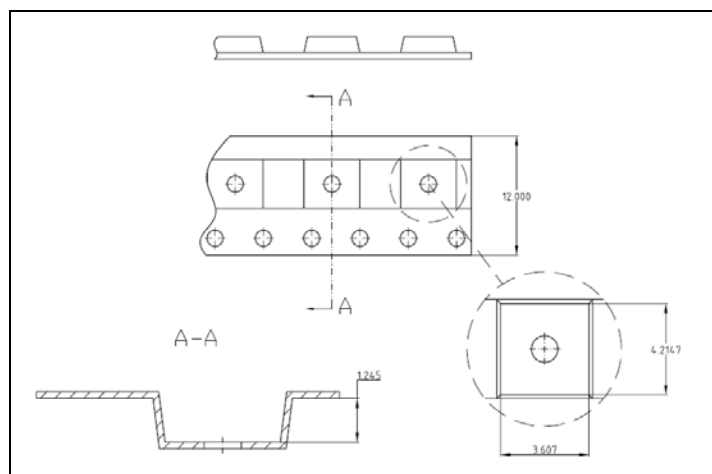

Yantel Corporation

Add: 16th Floor, West, AIDI Building, Binhe Road, Futian Area, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com