


Features

- Multilayer monolithic construction yields high reliability
- Low insertion loss and small size SMD chip design
- Can simplify your complex tuning and circuit design
- LTCC process


Specifications

NO.	Parameter		SPEC
1	Frequency (MHz)		13900 - 17500
2	Insertion loss (dB)		4.0 max.
3	Attenuation (dB)	0.1-10300 MHz	55 min.
		21300-40000 MHz	27 min.
4	VSWR		2 max.
5	In/Output Impedance (Ω)		50

Dimensions

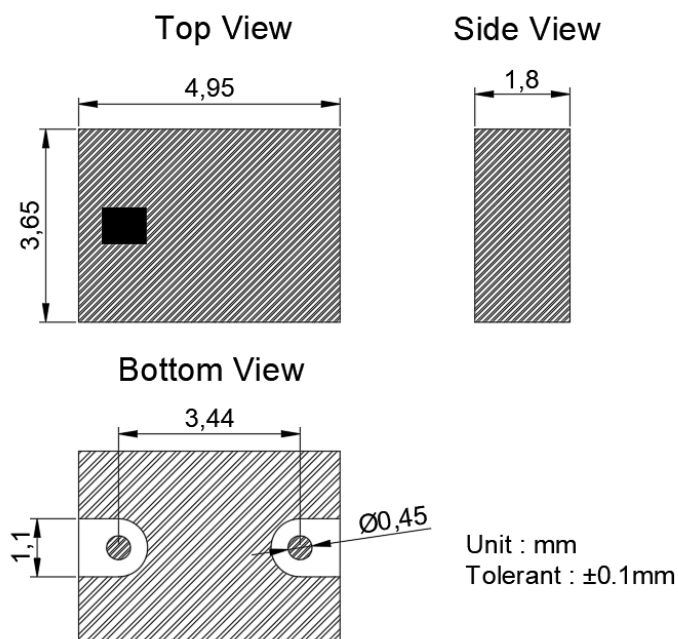

Typical Electrical Characteristics (T=25° C)

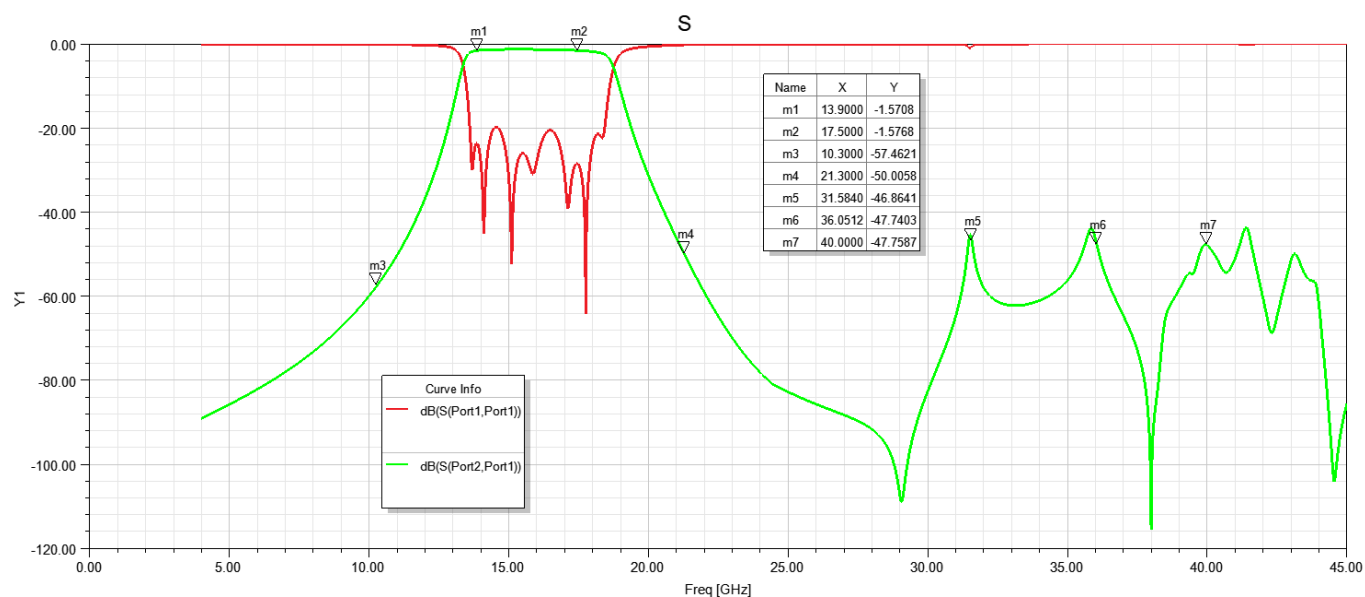

Yantel Corporation

Add: No.308-322,3F,Building 1,Juchuang Jingu Innovation Park,Wenyuan Road 35,Xili Street,Nanshan,Shenzhen,China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com